

COMPACT COMBI OVEN

STC 611 V2.4 W

Ref: 710861



TECHNICAL CHARACTERISTICS


Internal dimensions	(W)560 x (D)385 x (H)385 mm
External dimensions	(W)720 x (D)600 x (H)670 mm
Electric power	7.200 W
Maximum temperature	250°C
Weight	66 Kg
Voltage	400 V - 50/60 Hz
Connection	Three phase 3F + N + T

DESCRIPCIÓN

Compact combi oven with capacity for **6 GN 1/1 trays up to 40mm deep**, designed to elevate the cooking experience. It is equipped with the **DIGITAL PAD V2.4** control panel, a 2.4 inch LCD display screen and different functions selectable with its push-button panel. All the intelligence in the smallest possible space.

CAPACIDAD

- 4 GN 1/1 depth 65 mm trays
- 6 GN 1/1 depth 40 mm trays
- 11 GN 1/1 depth 20 mm trays

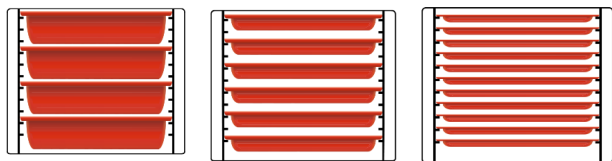

- Transverse tray position



STANDARD EQUIPMENT

- Control "DIGITAL PAD V 2.4"
- Rotation Inverter.
- End of cycle alarm.
- Door switch.
- Hinged glass.
- Interior LED light.
- ¾ " water connection.
- Safety thermostat.
- USB port

FUNCIONES

- **COOKING PHASES:** up to 3 cooking phases.
- **CLIMA CONTROL:** injects humidity by setting one of the 4 available injection levels.
- **MANUAL CHIMNEY CONTROL:** manually extracts or maintains steam inside the cooking chamber.
- **FAN CONTROL:** allows you to set up to 2 levels of bi-directional turbine speed.
- **PREHEATING:** automatic preheating of the oven before cooking.
- **RECIPE BOOK:** possibility of storing your favourite recipes in the oven's internal memory.
- **QR CONTROL:** connect the oven to a smart device via QR and easily modify and import recipes.

OPTIONALS

- Self-cleaning Ref. 710914
- Core probe Ref. 710913

CERTIFICATES



SPECIFIC ACCESORIES

STC 611 V2.4 W



STANDS



ST-C 200 W
Ref.710477 (W)700x(D)495x(H)200mm
Nº guides - 0



ST-C 400 W
Ref.710478 (W)700x(D)495x(H)400mm
Nº guides - 0




ST-C 650 W
Ref.710479 (W)700x(D)495x(H)650mm
Nº guides - 7




ST-C 850 W
Ref.710480 (W)700x(D)495x(H)850mm
Nº guides - 10

SELF-CLEANING



STC 2,4
Ref.710914

FUMES CONDENSER KIT



STC-W 1/1
Ref.710488 (W)530x(D)475x(H)235mm

STC- W 1/1 DUO
Ref.710715 (W)530x(D)475x(H)235mm

SUPERPOSITION KIT



ST-W1/1
Ref.710486 (W)530x(D)800x(H)100mm

FRONT TANK KIT




STC W
Ref.710871 (W)530x(D)800x(H)100mm

HOODS



STC-W 1/1
Ref.710481 (W)720x(D)750x(H)235mm

STC- W 1/1 DUO
Ref.710702 (W)720x(D)750x(H)235mm



**KIT CARBÓN
ACTIVO**
Ref.710907 (W)496x(D)538x(H)81mm



**RECAMBIO
FILTRO**
Ref.710943 Replacement active carbon filter

REMOVABLE PROBE KIT



CORE
Ref.710913

FIRST INSTALLATION KIT



UNO V2,4
Ref.710916

DUO V2,4
Ref.710939

CLEANING PRODUCTS



ACTIVE DUAL CLEAN 5 KG.
Ref.710918

ACTIVE DUAL CLEAN 10 KG.
Ref.710919

CERTIFICATE CE

STC 611 V2.4 W



DECLARACIÓN UE DE CONFORMIDAD

EU DECLARATION OF CONFORMITY

Directiva(s) del Consejo con la(s) que se declara conformidad:

Council Directive(s) to which conformity is declared:

DC 2014/35/EU + DC 2014/30/EU + DC 2011/65/EU

Aplicación de las Normas:

Application of the Standards:

UNE-EN 60335-1:2012 + AC:2014 + A11:2014 + A13:2017 + A14:2014 + A2:2020 + A1:2020; UNE-EN 60335-2-42:2004 + Corr:2007 + A1:2008 + A11:2012; UNE-EN 55014-1:2017 + A11:2021; UNE-EN 55014-2:2015; UNE-EN 61000-3-2:2014; UNE-EN 61000-3-3:2013 + A1:2020

Fabricante / Manufacturer's
name:

FM CALEFACCIÓN S.L.
CIF: B-14343594

Dirección / Manufacturer's
address:

CTRA. de Rute km.2.700, C.P.:14900, Lucena
Córdoba, España

Tipo de aparato / Type of
device:

HORNO / OVEN

Marca / Trade.:

FM CALEFACCIÓN

Modelo / Model no.:

STC 611 V2.4 W

N/S: 21XXXXXXXXXX

Nosotros, los abajo firmantes, declaramos bajo nuestra exclusiva responsabilidad que el equipo especificado cumple con la(s) Directiva(s) y Norma(s) mencionadas

We, the undersigned, hereby declare under our sole responsibility that the specified equipment is in conformity with the above Directive(s) and Standard(s)

Lugar / Place:

Lucena

Firma / Signature: **B-14343594**


Fecha / Date:

01/01/2024



TECHNICAL CHARACTERISTICS

STC 611 V2.4 W

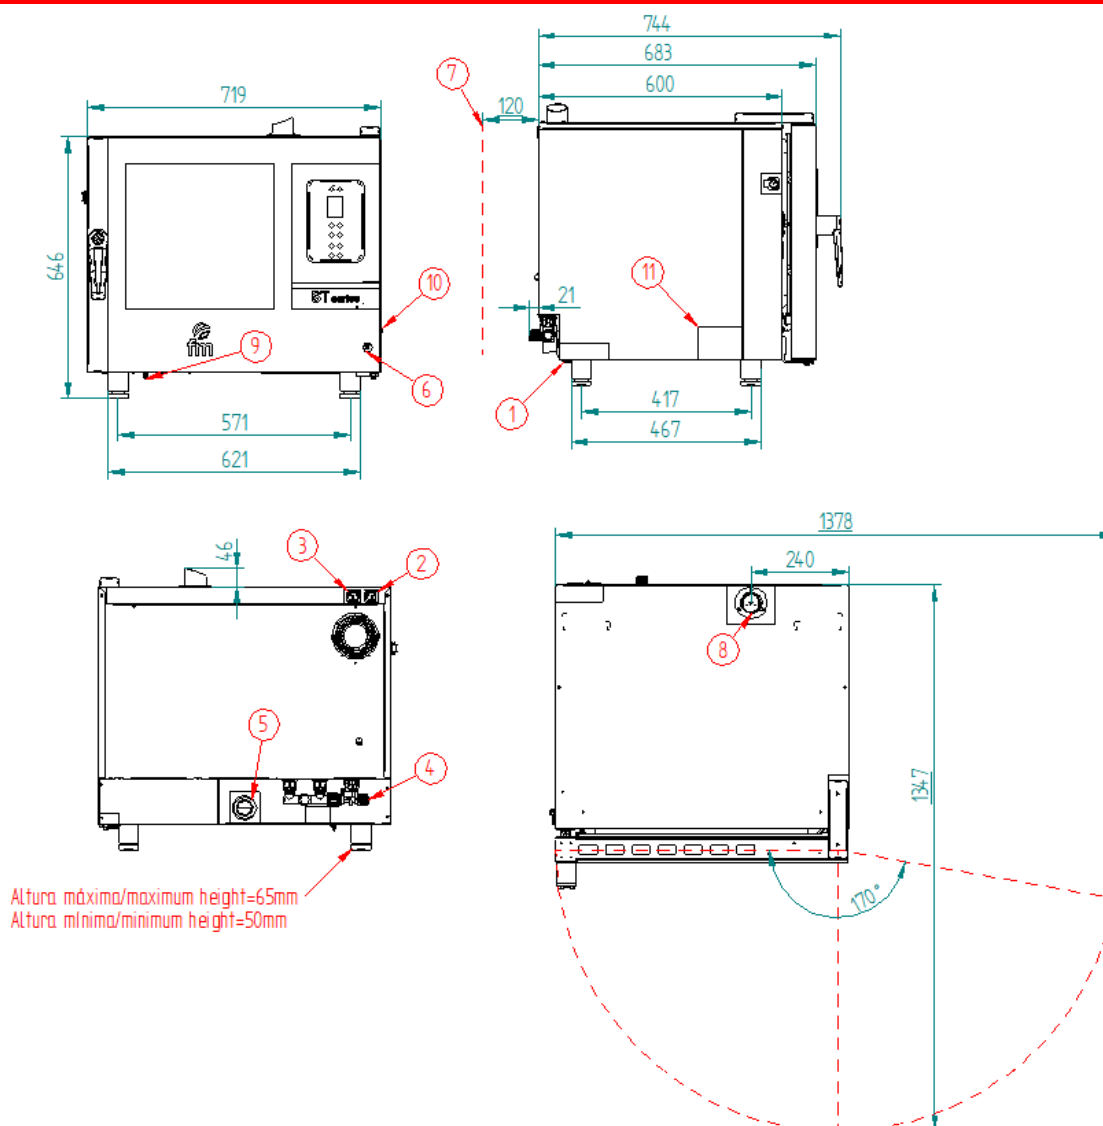

*Dimensions in mm

TECHNICAL CHARACTERISTICS	
Empty unit weight	
Unit + packaging weight	
Supply voltage	400Vac - Three phase
Frequency	50/60Hz
Supply voltage	Hood 3F+N+T 4mm2
Sound pressure level	Below to 70dB
Total power	7.200W
Thermal power	7.000W

CONEXIONADO	
1	Hose connection
2	Hood connection
3	Fumes condenser connection
4	Water connection 3/4"
5	Drain Ø40 mm
6	On/Off button
7	Safety gap ≥120 mm
8	Fumes exit Ø 50 mm
9	Safety thermostat reset
10	Core probe connection
11	Nameplate